

suprema

SECURITY & BIOMETRICS







Proven Leader in Access Control, Time & Attendance and Biometrics Solutions

Suprema Inc. was founded in 2000 and has become a leading global provider of security and biometrics.

By combining world renowned biometric algorithms with superior engineering, Suprema has introduced a number of technology initiatives and innovations to the security industry over the last two decades.

Suprema's extensive range of portfolio includes biometric access control systems, time & attendance solutions, fingerprint live scanners, mobile authentication solutions and embedded fingerprint modules. The company has established itself as a premium global brand in physical security industry and has worldwide sales network in over 140 countries. Suprema has no.1 market share in biometric access control in EMEA region and named to the world's top 50 security manufacturer.



Year Established

2000



Continuous Growth

20%

(CAGR 2014-2020)



EMEA Market Share

No.1

in Biometric Access Control
(IHS Markit 2017)



Number of people using
Suprema technologies

1 Billion +



Systems in Operation

1.5 Million +

(worldwide installations)



Global Sales Network in

140 Countries



National Identification
Projects in

23 Countries



Industry Patents and
Intellectual Properties

100+



Excellent Financial Stability

A+

(Korea Investors Service)



Suprema's world leading algorithms and technology protect the world with the power of true identity

WHY SUPREMA?



The World's Best Performing Fingerprint Algorithm

Suprema's fingerprint recognition algorithm has proven its superior performance by winning multiple awards and serves as a backbone for numerous fingerprint recognition devices. In addition, the advanced fingerprint recognition algorithm has also had its technology validated through obtaining international certifications such as FBI, IQS, STQC, FVC, and NIST MINEX. The algorithm boasts a level of stability far above other algorithms of its kind as well as the fastest authentication speed and the highest level of accuracy in the world.



The World's Most Widely Used Biometrics Technology

Suprema's biometrics technology is widely used in a variety of fields, including physical access control, ID card issuance, FinTech, forensic investigation, and mobile authentication, and is responsible for the security and safety of over one billion people around the world.



Complete Identification Solution Provider

Based on its biometrics technology, Suprema provides comprehensive solutions for identification with an extensive product line-up that encompasses fingerprint/face recognition devices, live scanners, embedded fingerprint recognition modules, and RFID devices.



Product Quality & Reliability

Suprema is committed to providing customers with reliable products of superior quality. We have obtained ISO 9001 and 14001 certifications and have already been recognized for the quality of our production process. We also run the largest biometrics research and production facility in South Korea with the aim of achieving better quality.



Global Brand Awareness

Having been recognized as a global leader in biometrics for more than a decade, Suprema is listed as one of the world's top 50 security companies by A&S, one of the world's most authoritative magazines in the field of security. In addition, Suprema was awarded the Best Product Prize and the Innovation Prize at international security exhibitions such as Sweden's Detektor Award, Russia's All-over-IP, and Brazil's ISC Brazil, and we were also named one of the world's top biometrics companies by Forbes, Frost & Sullivan, and Deloitte.



Global Sales Channels

Suprema has more than 1,000 clients in 140 countries, and more than 75% of our sales come from our official distribution channels. To enhance the competitiveness and sales of our global sales partners, Suprema provides systematic product training sessions, webinars, and marketing support through partner programs.



Technology Partnerships

Suprema is building technical partnerships with world-renowned security companies in a wide range of fields to provide customized solutions for the varied environments of our clients. With more than 70 integrated solutions, we are capable of meeting the needs of diverse clients, and we provide our clients with solutions that have the best performance.



End-to-end Solution Provider

Suprema provides comprehensive biometrics-based security solutions. Based on our globally recognized biometrics technology, we blend hardware and software platforms to provide comprehensive security solutions.



Beyond Technology

At present, Suprema has more than 40% of its employees engaged in research and development and invest more than 16% of its sales in R&D each year. Based on years of expertise in biometrics and security, Suprema has acquired over 100 technology patents and constantly endeavors to employ and develop new technologies.



Financial Stability & Growth Rate

Based on our innovative products and technology, Suprema has recorded a phenomenal mean annual growth rate (CAGR) of 20%. Recognized as a global leader in biometrics, Suprema is estimated to have a market capitalization of 350 million dollars (on the KOSDAQ as of 2020), boasting excellent financial stability.

ACCESS CONTROL SOLUTION FOR GENERAL DATA PROTECTION REGULATION (GDPR)

WHAT IS GDPR?

The General Data Protection Regulation (GDPR) is a regulation in EU law on data protection and privacy for all individuals within the European Union (EU) and the European Economic Area (EEA). Effective from May 25, 2018, GDPR also addresses the export of personal data outside the EU and EEA. The GDPR aims primarily to give control to citizens and residents over their personal data and to simplify the regulatory environment for international business by unifying the regulation within the EU. Fines for offences related to non-compliance with key provisions, will be up to 4% of annual revenue or 20 million Euros, whichever is greater.

HOW SUPREMA CAN HELP YOU TO PREPARE FOR GDPR COMPLIANCE?

When it comes to access control, GDPR requires that organization to implement appropriate technical and regulatory measure to provide security level against certain risk. Suprema's latest access control security solution now provides comprehensive GDPR-compliant features including below.



Secure biometric data protection by templates

Raw images of the fingerprints / faces are never stored in the device or server. All data is stored in templates which encrypted by 128bit AES, 256bit AES, DES/3DES depending on the designated storage location. (i.e. Device, Server and/or Smartcard)



Personal data protection by 'access on card'

With Access on Card (AoC) technology, Suprema provides system designers with option to store personal data only on smartcards. All personal data and credential is not stored on servers or devices but only on his/her smartcard of own possession.



Protection against transactions, malware and data breaches

TCP communication of data within the system is secured with the use of TLS 1.2 (including SSL/HTTPS). This ensures that no sensitive data is compromised during the communication between the devices and the central server.



Management of personal data lifecycle

In accordance with GDPR, Suprema makes it possible in BioStar 2 so that event logs and data stored in the server is automatically deleted after a certain period of time (set by the administrator). This is in line with the 'right to be forgotten' requirement in the GDPR.



Physical protection of privacy data on edge devices

All Suprema devices are equipped with a secure tamper feature, which ensures the security of data stored in the devices. If the device is removed from the wall and tampered with, the secure data (biometric templates, User ID, Logs) within the device will automatically be deleted.



Authentication for data access

With the latest update of BioStar 2, Suprema's open-architecture security platform, system administrators can fully customize level of right on access to personal data information according to their organizational requirements.



Providing proof of compliance

BioStar 2 delivers comprehensive audit logs compliant to GDPR

Visit Suprema website to learn more how we can help you to prepare GDPR compliance.
<https://www.supremainc.com/en/solutions/gdpr-privacy-protection.asp>

SUPREMA TECHNOLOGIES

Fingerprint Recognition Algorithm

Suprema's sophisticated fingerprint recognition algorithm has acquired international certifications such as FVC and NIST MINEX, and boasts the world's highest accuracy and fastest authentication speed. This algorithm has a false acceptance rate (FAR) of only 0.00001% and can match up to 150,000 people* per second.

* BioStation A2 (when the usage conditions are met)

Live Finger Detection Technology

Suprema's leading-edge live finger detection technology enables you to identify fake fingerprints forged with various materials by comparing and analyzing the irregular fingerprint patterns and characteristics of fake fingerprints and real fingerprints. This live finger detection technology has been created by combining a fake fingerprint detection algorithm with sensor imaging processing technology. Sensor imaging technology identifies fake fingerprints by comparing fingerprint images obtained via infrared light and white light. This technology enables quick and accurate identification of fake fingerprints made with materials such as paper, film, rubber, clay, silicone, and adhesives. The cutting-edge fingerprint sensor applied to Suprema's fingerprint recognition terminal can reduce image distortion and uniformly correct the contrast, which in turn results in enhanced authentication performance as well as more effective detection of various kinds of fake fingerprints.

Open Supervised Device Protocol (OSDP) support

Suprema's terminals and readers support OSDP, a standard RS-485 communication protocol, in order to enhance interoperability between devices. OSDP enables you to use Suprema's card readers and biometrics terminals by connecting them to third-party control panels and security systems without additional system integration or system development. In addition, with its encrypted bi-directional communication, it also provides enhanced security features and enables you to design more flexible systems.

Face Recognition Technology

Suprema's face recognition technology bases itself on our own proprietary patented adaptive IR technology. This technology boasts the levels of speed and accuracy that far exceed those of any existing facial recognition method. It provides fast and accurate face recognition at any level of brightness, and it also provides live face detection, making it ideal for environments that require a high level of security. Suprema's face recognition terminal has a false acceptance rate (FAR) of only 0.00002% and can match up to 3,000* people per second.

* FaceStation 2 (when the usage conditions are met)

Face Detection

Suprema's access control terminal with a built-in high-definition camera detects the user's face upon their authentication attempt and then performs authentication. It can save the circumstances in which authentication has been performed as an image log. Authentication based on face detection technology provides an efficient type of audit trail as well as enhanced security.

Live Face Detection Technology

Live face detection technology applied to Suprema's face recognition terminal detects forged faces using advanced analysis algorithms. This technology identifies forged faces through combining information, such as the curves, skin tone, and skin quality of the user's face, which is acquired using the IR LED built into the face recognition terminal.

Power over Ethernet (PoE)

Suprema's IP terminal performs both stable power delivery and data transmission at once via an Ethernet cable. Its PoE* feature eliminates the need for extra wiring and therefore enables you to build a system with ease at low installation cost.

* IEEE 802.3af compliant

Distributed System

In distributed systems, IP terminal and readers perform the roles of a controller and reader simultaneously. Therefore, you can undertake functions such as user management, access control management, and biometrics with a single terminal. Suprema's IP terminals and readers improve system reliability with easy system configuration and distributed management. It also provides the benefits of simple wiring and low installation/maintenance costs.

Centralized System

With Suprema's CoreStation and readers, you can build a centralized system, which is a system based on access control units (ACU). Suprema's centralized system not only provides the benefits of biometrics, but it also provides enhanced security and excellent system scalability. In addition, the centralized system also enables you to upgrade your existing systems at lower installation cost.



BioStar 2 is a web-based, open, and integrated security platform that provides comprehensive functionality for access control and time & attendance

BioStar 2 Platform

BioStar 2 is a web-based, open, and integrated security platform that provides comprehensive functionality for access control, time & attendance, visitor management, and video logs. It encrypts every personal data available and supports both SDKs and web APIs to integrate BioStar 2 with 3rd party software. In addition, users can control the BioStar 2 platform remotely with the mobile app for BioStar 2 and manage a mobile access card that you can use to access sites.



Biometrics-Based



Low Maintenance Cost



Mobile App Support



Remote Control Support



System Integration Tool Support



Time & Attendance Management License				
Item	Starter (free of charge)	Standard	Advanced	Professional
No. of Users	100	500	1,000	Unlimited

Video Log License		
Item	Starter (free of charge)	Video License
Video Logs	-	v

Visitor License		
Item	Starter (free of charge)	Visitor License
Visitor Management	-	v

Access Control License							
Item		Starter (free of charge)	Basic	Standard	Advanced	Professional	Enterprise
Access Control	No. of Doors	5	20	50	100	300	1,000
	Maximum No. of Connected Devices	1,000	1,000	1,000	1,000	1,000	1,000
	Maximum No. of Access Levels ¹⁾	2,048	2,048	2,048	2,048	2,048	2,048
	Maximum No. of Access Groups ¹⁾	2,048	2,048	2,048	2,048	2,048	2,048
	Maximum No. of Access Groups per User	16	16	16	16	16	16
	Maximum No. of Access Levels per Access Group	128	128	128	128	128	128
	Access Group Auto Sync	v	v	v	v	v	v
Users	Maximum No. of Cards per User	8	8	8	8	8	8
	Maximum No. of Fingerprints per User	10	10	10	10	10	10
	User Auto Sync	v	v	v	v	v	v
	Access-on-Card	v	v	v	v	v	v
	Security Credential Cards	v	v	v	v	v	v
	iCLASS Seos Card	v	v	v	v	v	v
	Inactivation User Reports	v	v	v	v	v	v
Custom Field	v	v	v	v	v	v	
Elevator Control	Elevators	-	-	-	v	v	v
	Maximum No. of Floors per Elevator	-	-	-	192	192	192
	Maximum No. of Floor Levels	-	-	-	2,048	2,048	2,048
Zones	Anti-Passback	△(Door)	△(Door)	v	v	v	v
	Fire Alarm	-	-	v	v	v	v
	Schedule Lock/Unlock	-	-	v	v	v	v
	Intrusion Alarm Zone	-	-	v	v	v	v
	Interlock Zone	-	-	v	v	v	v
	Muster Zone	-	-	v	v	v	v
Advanced Features	Dashboard	v	v	v	v	v	v
	Cloud	-	-	v	v	v	v
	Server Matching	-	-	-	v	v	v
	Audit Trail	v	v	v	v	v	v
	Daylight Saving Time	v	v	v	v	v	v
	Dual Authentication	v	v	v	v	v	v
	Active Directory	-	-	-	v	v	v
Monitoring	Graphic Map	-	-	-	v	v	v

¹⁾ Available from BioStar 2.7.12 (Requires latest firmware)

BioStar 2 AC | Access Control

You can use the advanced access control features of the BioStar 2 access control module by purchasing a license. With the purchase of a license, in addition to BioStar 2's basic license features, you can also use elevator control, advanced anti-passback zone control, fire alarm zone, scheduled lock/unlock zone, intrusion alarm zone, server matching, and video log features. Moreover, because you can use both distributed and centralized access control system configurations, you can provide your clients with optimal access control systems that can accommodate various environments and customer needs.



Customized System Architecture



Elevator Control



Improved Zone Management



Server Matching



Video Logs



Visitor Management



BioStar 2 TA | Time & Attendance

You can use the BioStar 2 time & attendance module when you intend to build a more flexible time & attendance system by purchasing a license. In addition to BioStar 2's basic license features, the BioStar 2 time & attendance module also provides features that enable you to set an unlimited number of schedules and specify the number of users for each schedule. Therefore, the BioStar 2 time & attendance module is ideal for when you want to build an enterprise-class system or create a variety of time & attendance rules.



Various Shift Settings



Flexible Work Management



Easy Shift Type Setting



Timesheet Calendar View




Suprema Mobile Access



With Suprema Mobile Access, you can use your smartphone as an access card to access doors, facilities, and more. This solution for access control significantly improves user convenience and supports 3rd party systems in an easier way. By linking BioStar 2 and Suprema Airfob Portal, you can issue mobile access cards to users in BioStar 2. And users who are registered with BioStar 2 can be issued with mobile access cards through a link received by email without signing up for a portal or registering mobile access cards separately.

Extreme performance with two technologies, NFC and BLE.

Suprema Mobile Access supports both NFC and BLE for full compatibility with various types of smartphones. These two technologies enabled at the background and foreground to communicate with a RFID reader seamlessly. With Suprema's enhanced technology, Suprema Mobile Access prevents unintentional openings by controlling BLE communication distance, allowing authentication times of less than a second.

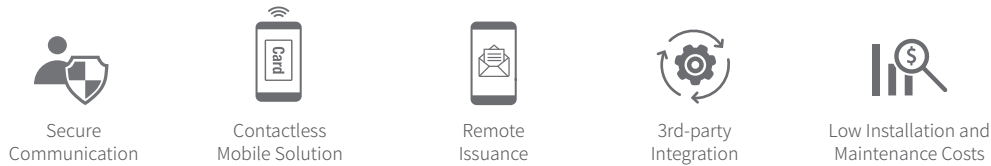


With Suprema's exclusive security solutions, entire process is protected by ISO 27001 certified system architecture. Users are less likely to handle over their smartphones, so it prevents unauthorized person from entering your property.

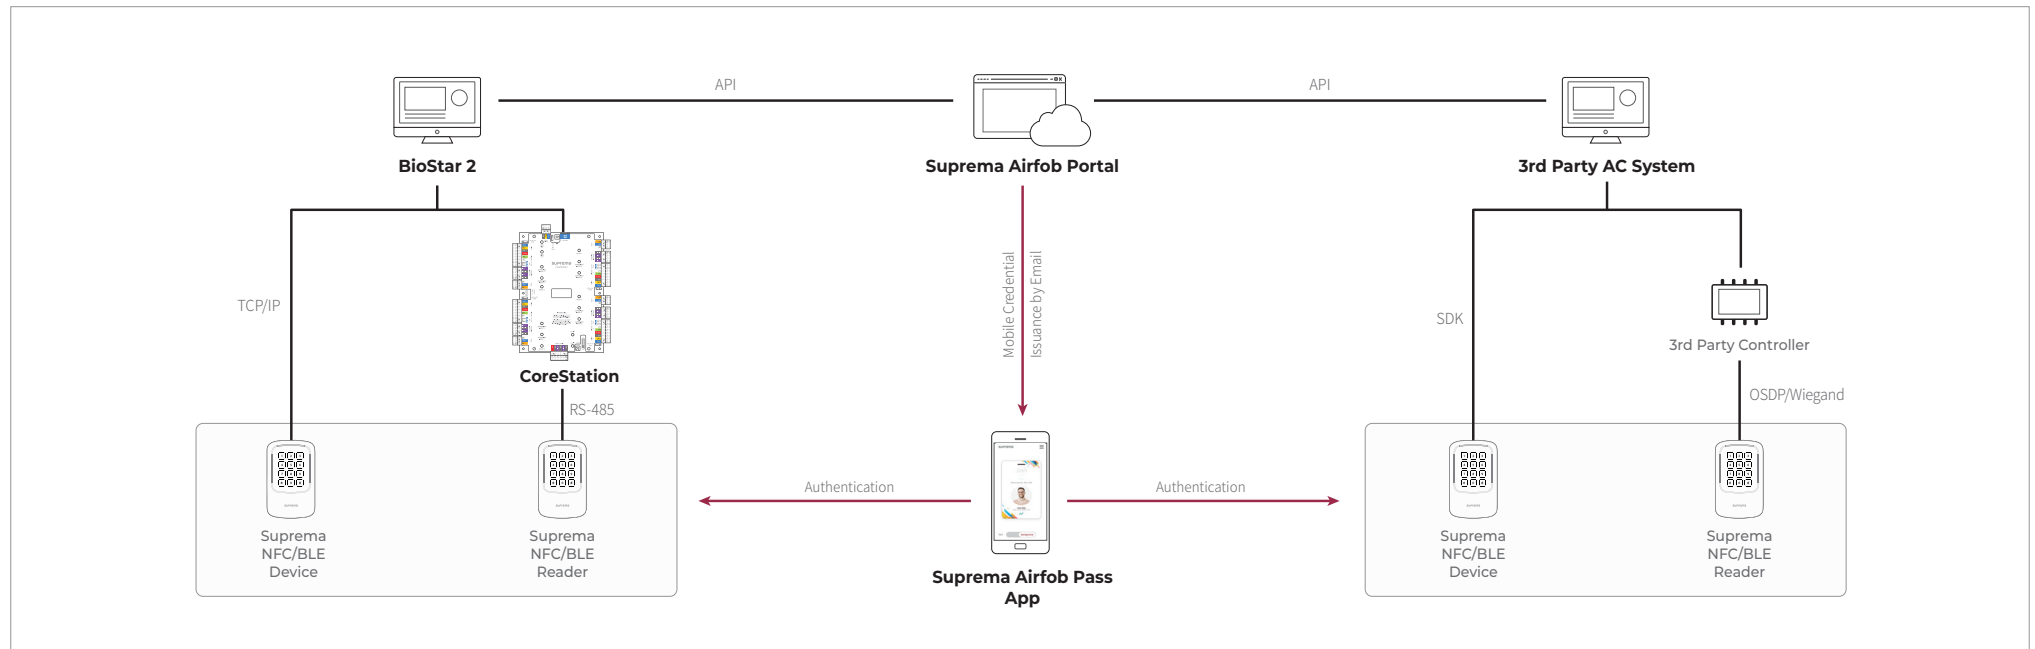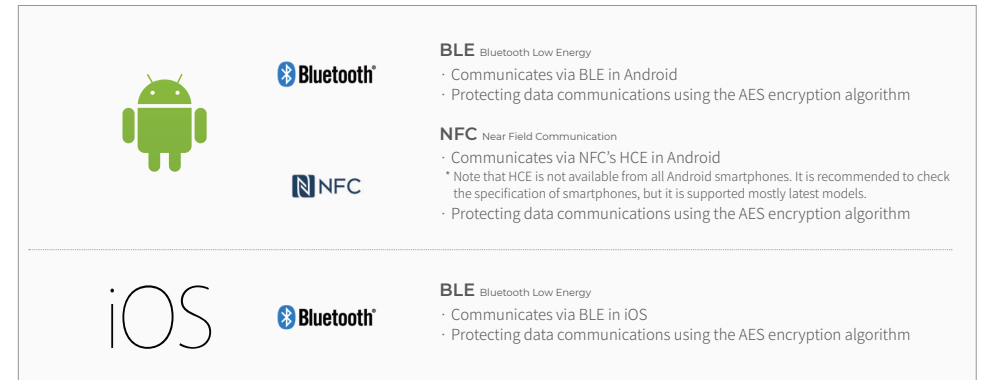

BioStar 2 Mobile App



BioStar 2 Mobile enables you to freely control BioStar 2 anywhere, at any time on your smart device. Developed based on BioStar 2's web APIs, BioStar 2 Mobile provides services appropriate for the mobile era, including user information registration, BioMini-based fingerprint registration, door control, real-time door and zone status notification, and access control event monitoring.

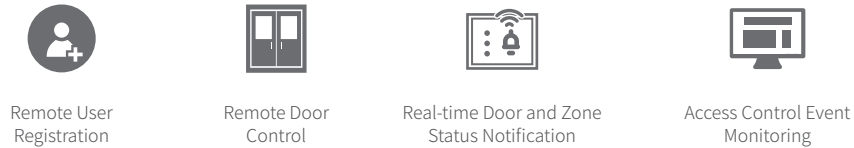

Suprema Device Manager

The Suprema Device Manager is a mobile application that can set XPass D2 and XPass 2 of Suprema using BLE connection. This application eliminates the need for administrators to access the server on the PC or physically disconnect the device. You can set the network, server, RS-485 connection, card format, LED and buzzer of the device directly from mobile device, and you can use additional functions such as device restart or firmware upgrade. In addition, you can save the set values as a template and apply quickly and easily to multiple devices.

- RS-485 Address & Baudrate
- Wiegand Output Format
- LED & Buzzer
- Smart Card Key
- PIN Input Mode
- FW Upgrade
- 3rd party system (XPass D2 only)

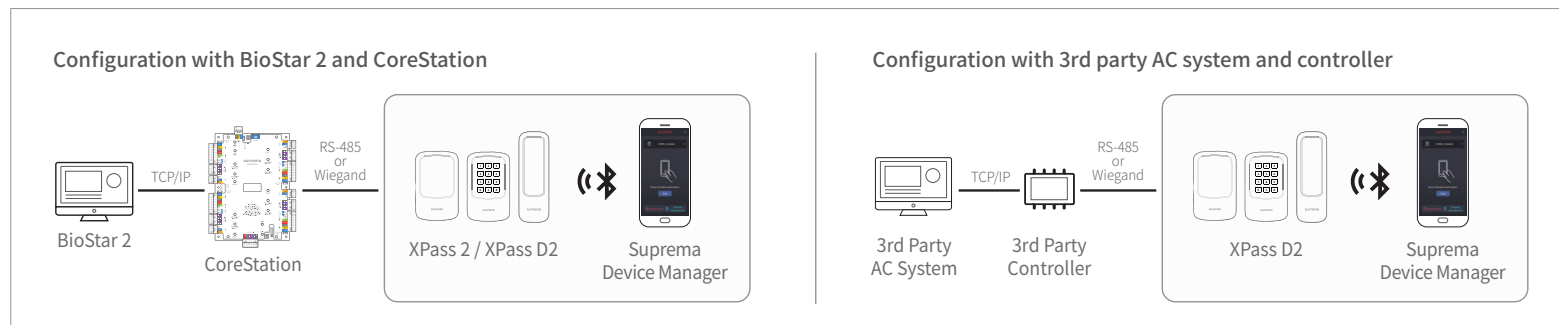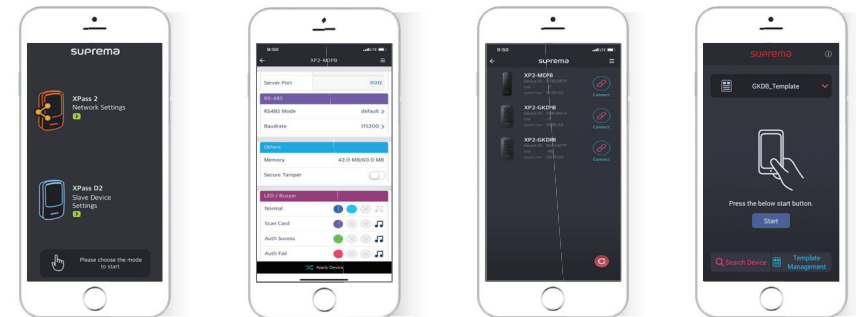

Supported Devices

Check whether your mobile device supports BLE connection.

- Android 5.0 Lollipop OS or later
- iOS 9.0 or later

Check the compatible device and firmware version

- XPass D2 FW 1.1.0 or later
- XPass 2 FW 1.0.0 or later

Suprema G-SDK

Suprema G-SDK is a software development kit for allowing Suprema devices to be integrated with third-party software. It is a lightweight, scalable, and cross-platform solution which expedites your development.

Multi-language support

By using gRPC which is an open source PRC framework, Suprema G-SDK lowers the barrier for developers by supporting a wide range of programming languages such as C++, C#, Java, Python, Objective-C, Go, JavaScript, and more.

Higher scalability

With Suprema G-SDK, you can control device connections via gateways. Suprema G-SDK can support connectivity of up to 1,000 devices via a device gateway and a master gateway which supports up to 100,000 devices by coordinating multiple device gateways in parallel.

BioStar 2 Device SDK

The BioStar 2 Device SDK is a development tool that enables you to control the core features of Suprema's terminal through third-party software. This development framework can be applied to both Suprema's access control and time & attendance terminals, and it opens up unlimited possibilities for building powerful access control and time & attendance solutions.

Builds Powerful Solutions

The BioStar 2 Device SDK enables you to control the powerful functions provided by Suprema's terminal through your existing management software. The BioStar 2 Device SDK enables you to manage access control, time & attendance, and device settings with ease as well as to build solutions that suit your needs.

Standalone Data Architecture and API

With the BioStar 2 Device SDK, you can develop software using concise code instead of complex branching statements. In addition, because the property information of each device is provided as a single architecture, you do not have to modify the UIs or logic of your existing applications even when a new device has been added.

SVP Android SDK

The Suprema Versatile Platform (SVP) Android SDK is a programming interface designed to take advantage of the core functions of Suprema devices in other software. The SDK is made up of a set of APIs that make it easy to use the Suprema device's functionality for developing solution applications for time and attendance on Android.

Innovates workforce management

SVP Android SDK allows you to create a customized time and attendance management app to unlock the full potential of your workforce management system.

Perfect compatibility

With the SVP Android SDK, you can use your own application on Suprema's devices, both NOVUS and OMNIS.

BioStar 2 API

The BioStar 2 API is a Web API that enables you to integrate the core features of BioStar 2 with third-party software as well as to control them. It is the perfect tool that enables you to develop mobile access control applications based on BioStar 2's powerful features.

Provides Optimized Development Environments

The standardized BioStar 2 API enables you to directly communicate with BioStar 2 using REST and JSON without going through the SDK of your device. This makes it easy to integrate with other web-based solutions and enables you to develop apps in Android and iOS as well.


Open Source


With the exception of the access control feature, which is one of BioStar 2's core features, all supplementary features are provided as modular applications. Because most of the applications have been developed using the BioStar 2 API, they can be used as open source software, thereby creating new value or increasing platform scalability.


Distributed System | Access Control and Time & Attendance


In distributed systems, IP terminal and readers perform the roles of a controller and reader simultaneously. Therefore, you can undertake functions such as user management, access control management, and biometrics with a single terminal. Suprema's IP terminals and readers improve system reliability with easy system configuration and distributed management. It also provides the benefits of simple wiring and low installation/maintenance costs.




- 


Biometrics-Based System
- 

Easy Installation
- 

Outstanding Scalability
- 

Various Biometrics Devices available
- 

Low Installation and Maintenance Costs

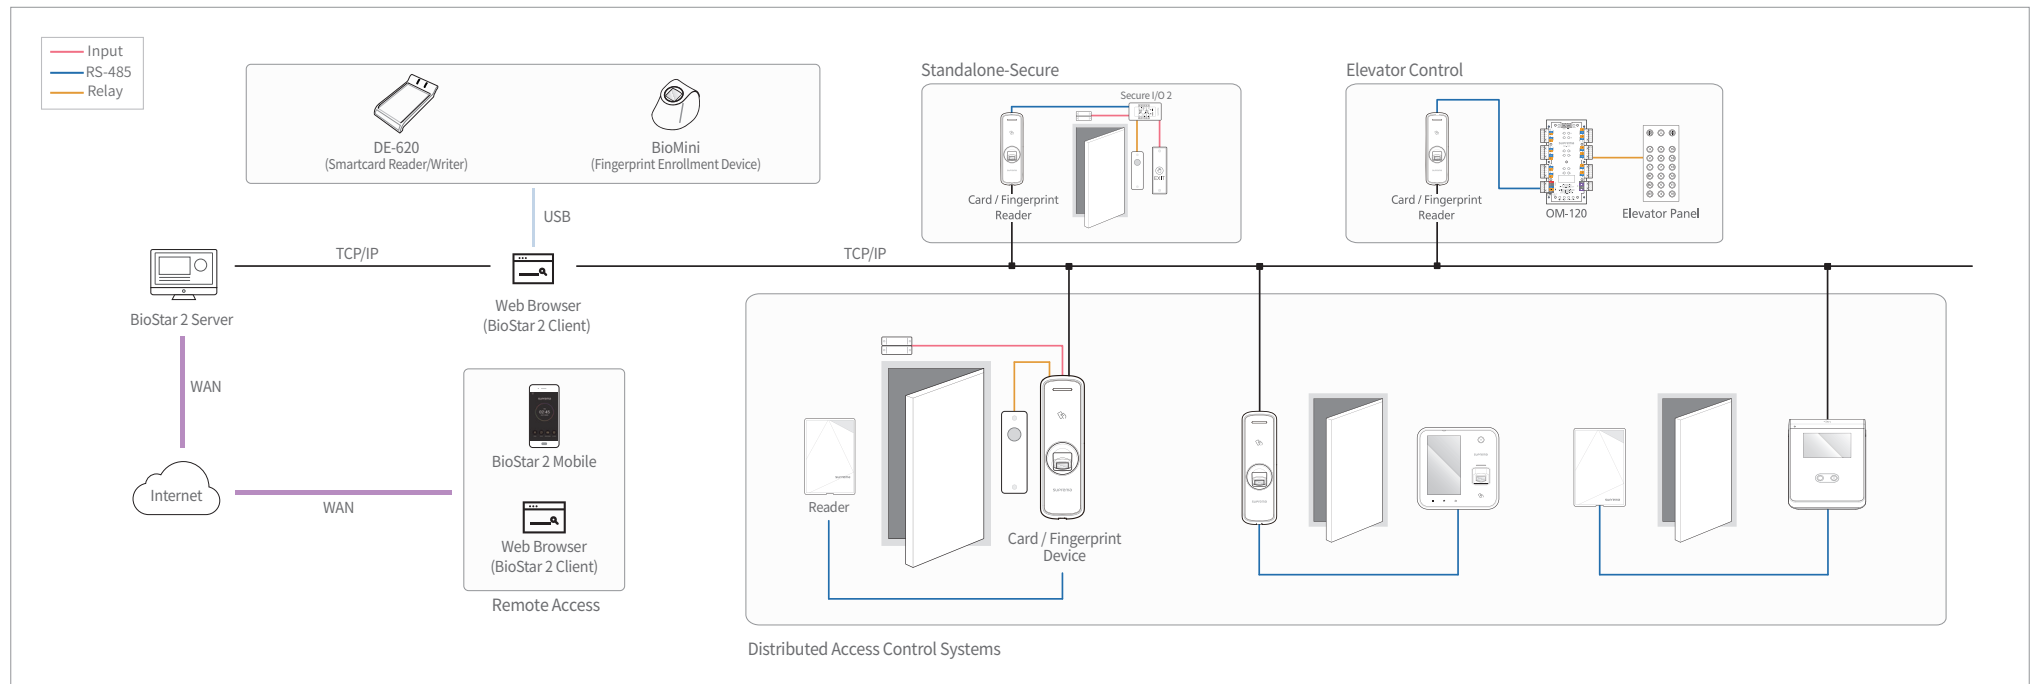



Supported Products



Fusion Multimodal Terminal
FaceStation F2



IP Face Recognition Terminal
FaceStation 2



Compact IP Face Recognition Terminal
FaceLite



IP Fingerprint Terminal
BioStation A2



Outdoor IP Fingerprint Terminal
BioStation 2



IP Fingerprint Terminal
BioStation L2



Outdoor IP Fingerprint Terminal
BioLite N2



Outdoor IP Fingerprint Device
BioEntry W2



Compact IP Fingerprint Device
BioEntry P2



Outdoor Compact RFID Device
XPass 2



IP RFID Device
Xpass S2



Secure Door Control Module
Secure I/O 2



Secure Multi Output Module
OM-120

Centralized System | Access Control and Time & Attendance


With Suprema's CoreStation and readers, you can build a centralized system, which is a system based on access control units (ACU). Suprema's centralized system not only provides the benefits of biometrics, but it also provides enhanced security and excellent system scalability. In addition, the centralized system also enables you to upgrade your existing systems at lower installation cost. Integrated with BioStar 2, this system safely stores all information about each user including the user's name, ID, PIN, access rights and fingerprint data by storing it on a single device. Suprema's intelligent biometric controller, CoreStation, is capable of performing fingerprint matching as well as RFID cards. It provides differentiated performance and features based on a 4-channel module that boasts superior hardware performance and scalability.

Performance of a CoreStation, Not Just a Number

- Performs 400,000 match/sec
- Stores up to 500,000 users and RFID cards
- Stores up to 5,000,000 text logs
- Controls up to 132 Wiegand devices (DM-20 connection required)
- Controls up to 64 RS-485 devices
- Processes fingerprint authentication on up to 8 devices simultaneously within 1 second

CoreStation SETUP Manager

CoreStation SETUP Manager is a program that allows users to connect CoreStation to the PC directly to view or manage the network settings of CoreStation and monitor the status of slave devices, input and output ports, and Wiegand ports.

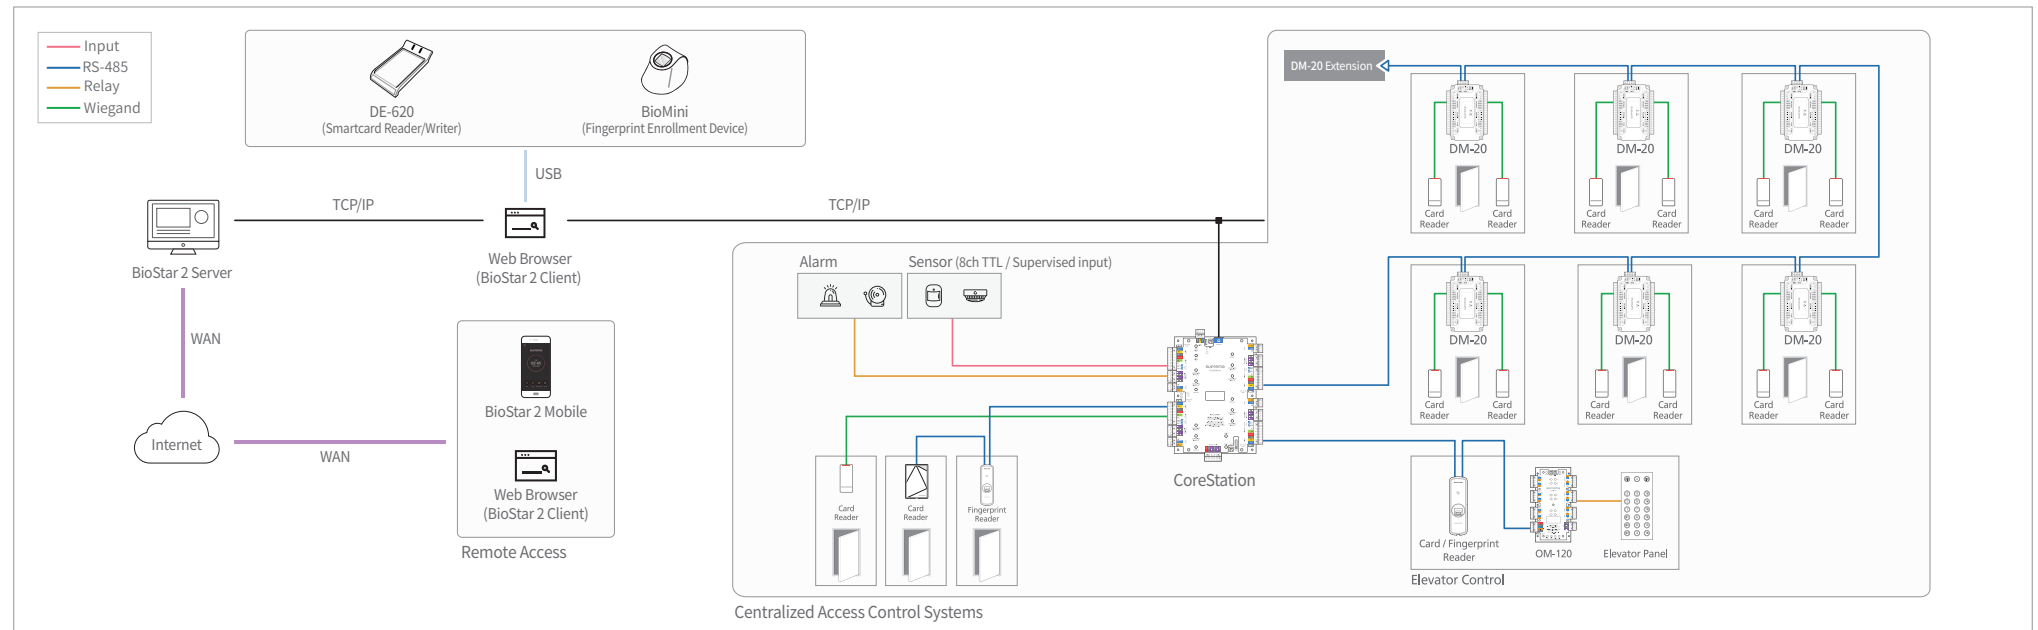



Supported Products




Intelligent Biometric Controller
CoreStation



Compact Fingerprint Reader
BioEntry R2



Outdoor Compact RFID Reader
XPass D2



Secure Multi-output Module
OM-120



Secure Multi-door I/O Module
DM-20

Accessory



Dedicated Cabinet
ENCR-10

CoreStation 4 Door Access Control Kit

Suprema's 4 Door Access Control Kit offers you a basic starter package comprised of control panel, readers and free software to make your 4 door access control system installs quick and easy.

- The kit consists of :



Category	Product Name	Unit	Description
Access Control Software	BioStar 2 (Starter)	-	Web-based open integrated security platform providing complimentary access control (up to 5 doors)
Access Control Panel	CoreStation (CS-40)	1	Intelligent biometric controller (expandable up to 132 doors)
Suprema Mobile Access Card (2 Options Available)	Mobile Dynamic Card	-	1 month free subscription with unlimited numbers of Mobile Access Card issuance
	Mobile Regular Card	50	Free Mobile Access Cards
Readers* (4 Options Available)	XPass D2 (XPD2-MDB)	4	Mullion RFID reader
	XPass D2 (XPD2-GDB)	4	Gangbox RFID reader
	XPass D2 (XPD2-GKDB)	4	Gangbox RFID reader with a number keypad
	BioEntry R2 (BER2-OD)	4	Fingerprint & RFID reader (Mobile Access Cards are not available)

* All RFID readers above support the following formats: 125 kHz EM/Prox & 13.56 MHz MIFARE, MIFARE Plus, DESFire EV1/EV2, FeliCa





Suprema Thermal Camera

Suprema Thermal Camera can be used in combination with Suprema face recognition terminals to detect users with elevated skin temperature.

Disclaimer: Suprema products are not used to diagnose any medical conditions. Suprema thermal cameras can identify individuals with skin temperature higher than a preset figure but should not be solely or primarily relied upon to diagnose or exclude a diagnosis of COVID-19, or any other disease. Only a licensed medical professional can determine if a person with elevated skin temperature is symptomatic of a specific medical condition.



Enhanced Security and Safety

Suprema Thermal Camera combines with Suprema face recognition terminals to detect users with elevated skin temperature. The device displays temperature on a GUI and raises alerts when higher than threshold temperature is detected.



Accurate Temperature Measurement

Suprema Thermal Camera increases the accuracy and consistency of the temperature measurement by using Suprema's face recognition algorithm to pinpoint the upper area of the face.



Easy Deployment

Suprema Thermal Camera easily connects with Suprema face recognition terminals via USB interface. It comes with a bracket for convenient deployment on new and retrofit installs.

* Supported Device : FaceStation F2, FaceStation 2

Part Code	TCM10-FSF2	TCM10-FS2
Max. Resolution	120 x 160	
NETD (Noise Equivalent Temperature Difference)	≤ 50 mK (@25°C, F# = 1.0)	
Field of View	37.2° x 50° (H x V)	
Temperature Range	30°C to 45°C (86°F to 113°F)	
Temperature Accuracy*	≤ ±0.5°C (0.9°F)* / ±0.3°C (0.5°F)**	
Temperature Distance	Adjustable, 50 cm–100 cm (15.7" to 31.5")	Adjustable, 40 cm–80 cm (15.7" to 31.5")
Interface	USB	
Operating Temperature	0°C to 50°C (32°F to 122 °F)	
Dimensions (W x H x D)	Camera: 77 mm x 46 mm x 22.2 mm (3.03" x 1.81" x 0.87") Camera with Bracket: TCM10-FSF2-ODB : 109.89 mm x 315.69 mm x 13 mm (4.33" x 12.43" x 0.51") TCM10-FSF2-DB : 109.89 mm x 283.39 mm x 13 mm (4.33" x 11.16" x 0.51")	Camera: 77 mm x 46 mm x 22.2 mm (3.03" x 1.81" x 0.87") Camera with Bracket: 139.84 mm x 163.8 mm x 22.8 mm (5.51" x 6.45" x 0.90")
Components	Thermal camera with bracket and USB cable, Bracket Fixing Screw x 5, PVC Anchor x 6, Fixing Screw x 6	Thermal camera with bracket and USB cable, 6 screws (does not include FaceStation 2)
Firmware	v1.0.0 and above	v1.3.2 or v1.4.0 and above
Compatible BioStar 2	v2.8.6 and above	

* For ±0.5°C accuracy, use the device:
 - In recommended ambient temperature (10°C to 35°C or 50°F to 95°F)
 - 90 minutes after turning on 90 minutes after turning on for self-calibration







** According to KOLAS (Korea Laboratory Accreditation Scheme) calibration certificate






Performance and Specification Comparison




Product						
Product Name		FaceStation F2	FaceStation 2	FaceLite	BioStation A2	BioStation 2
General	Biometrics	FSF2-DB, AB: Face / FSF2-ODB: Face, Fingerprint	Face	Face	Fingerprint	Fingerprint
	LFD (Live Finger Detection)	FSF2-DB, AB: - / FSF2-ODB: Yes (SW-based)	-	-	Yes	-
	Protection Class	IP65	-	-	-	IP65
	RF Options	FSF2-DB: 125kHz EM & 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2*, FeliCa FSF2-AB: 125kHz EM, HID Prox & 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2*, FeliCa, iCLASS SE/SR/Seos FSF2-ODB: 125kHz EM & 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2*, FeliCa	FS2-D: 125kHz EM & 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2*, FeliCa, NFC FS2-AWB: 125kHz EM, MIFARE Plus, HID Prox & 13.56MHz MIFARE, DESFire EV1/EV2*, FeliCa, iCLASS SE/SR/Seos, NFC & 2.4GHz BLE	FL-DB: 125kHz EM & 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2*, FeliCa, NFC & 2.4GHz BLE	BSA2-OEPW: 125kHz EM BSA2-OHPW: 125kHz HID Prox BSA2-OIPW: 13.56MHz iCLASS SE/SR/Seos, NFC BSA2-OMPW: 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2*, FeliCa, NFC	BS2-OEPW: 125kHz EM BS2-OHPW: 125kHz HID Prox BS2-OIPW: 13.56MHz iCLASS SE/SR/Seos, NFC BS2-OMPW: 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2*, FeliCa, NFC
Capacity	Max. Users (1:1)	100,000	30,000	30,000	500,000	500,000
	Max. Users (1:N)	100,000	3,000	3,000	100,000	20,000
	Max. Templates (1:1)	100,000	900,000*	900,000*	1,000,000*	1,000,000*
	Max. Templates (1:N)	Face: 50,000 / Fingerprint: 100,000	90,000*	90,000*	200,000*	40,000*
	Max. Text Logs	5,000,000	5,000,000	5,000,000	5,000,000	3,000,000
	Max. Image Logs	50,000	50,000	-	50,000	-
Interfaces	Wi-Fi	-	Yes (Built-in)	-	Yes (Built-in)	Yes (Built-in)
	TCP/IP	Yes	Yes	Yes	Yes	Yes
	RS-485	1ch Host or Slave (Selectable)	1ch Host or 1ch Slave	1ch Host or 1ch Slave	1ch Host or Slave	1ch Host or Slave
	Wiegand	1ch Input or Output (Selectable)	1ch In and 1ch Out	1ch In and 1ch Out	1ch In and 1ch Out	1ch In and 1ch Out
	I/O	2ch Inputs	2 Inputs	2 Inputs	2 Inputs	2 Inputs or 2 Outputs
	Relay	1 Relay	1 Relay	1 Relay	2 Relays	1 Relay
	USB	USB 2.0 (Host)	Host	Host	Host	Host
Hardware	CPU	1.8 GHz Dual Core + 1.4 GHz Quad Core	1.4 GHz Quad Core	1.2 GHz Quad Core	1 GHz Quad Core	1.0 GHz
	Memory	16 GB Flash + 2 GB RAM	8 GB Flash + 1 GB RAM	8 GB Flash + 1 GB RAM	8 GB Flash + 1 GB RAM	8 GB Flash + 128 MB RAM
	Audio	16 bit	24 bit/Voice DSP (echo cancellation)	24 bit/Voice DSP (echo cancellation)	24 bit/Voice DSP (echo cancellation)	16-bit Hi-Fi
	Operating Temperature	-20°C ~ 50°C (-68°F ~ 122°F)	-20°C ~ 50°C (-4°F ~ 122°F)	-20°C ~ 50°C (-4°F ~ 122°F)	-20°C ~ 50°C (-4°F ~ 122°F)	-20°C ~ 50°C (-4°F ~ 122°F)
	Tamper	Yes	Yes	Yes	Yes	Yes
	Power	Voltage: DC 12V ~ DC 24V / Current: Max. 2.5 A	24VDC	24VDC	12VDC	12VDC
	PoE	-	-	-	Yes	Yes
	Dimensions (W x H x D mm)	FSF2-DB, AB: 119.8 x 223 x 23.5 FSF2-ODB: 119.8 x 268.4 x 49.7	141 x 164 x 125	80 x 160.3 x 71.8	155 x 155 x 40	142 x 145 x 45
	Certifications	CE, FCC, KC, RoHS, REACH, WEEE	CE, FCC, KC, RoHS, REACH, WEEE, BT SIG	CE, FCC, KC, RoHS, REACH, WEEE, BT SIG	CE, FCC, KC, RoHS, REACH, WEEE	CE, FCC, KC, RoHS, REACH, WEEE

					
BioStation L2	BioLite N2	BioEntry W2*	BioEntry P2	XPass 2	Xpass S2
Fingerprint	Fingerprint	Fingerprint	Fingerprint	-	-
Yes	-	Yes	-	-	-
-	IP67	IP67, IK09	-	IP65, IP67, IK08	IP65
BSL2-OE: 125kHz EM	BLN2-ODB: 125kHz EM & 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2*, FeliCa, NFC & 2.4GHz BLE	BEW2-ODPB: 125kHz EM & 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2*, FeliCa, NFC, 2.4GHz BLE	BEP2-OD: 125kHz EM & 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2*, FeliCa, NFC	XP2-MDPB, XP2-GDPB, XP2-GKDPB: 125kHz EM & 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2*, FeliCa, NFC & 2.4GHz BLE	XPS2M: 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2* (CSN), FeliCa
BSL2-OM: 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2*, FeliCa, NFC	BLN2-OAB: 125kHz EM, HID Prox & 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2*, FeliCa, iCLASS SE/SR/Seos, NFC & 2.4GHz BLE	BEW2-OHPB: 125kHz EM, HID Prox & 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2*, FeliCa, NFC, 2.4GHz BLE	BEP2-OA: MIFARE Plus, DESFire EV1/EV2*, 125kHz EM, HID Prox & 13.56MHz MIFARE, FeliCa, iCLASS SE/SR/Seos, NFC		
	BLN2-PAB: 125kHz EM, HID Prox & 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2*, FeliCa, iCLASS SE/SR, iCLASS Seos, NFC & 2.4GHz BLE	BEW2-OAPB: 125kHz EM, MIFARE Plus, HID Prox & 13.56MHz MIFARE, DESFire EV1/EV2*, FeliCa, iCLASS SE/SR/Seos, NFC, 2.4GHz BLE			
500,000	10,000	500,000	10,000	200,000	50,000
100,000	10,000	100,000	10,000	200,000	50,000
1,000,000*	20,000*	1,000,000*	20,000*	-	-
200,000*	20,000*	200,000*	20,000*	-	-
1,000,000	1,000,000	1,000,000	1,000,000	1,000,000	100,000
-	-	-	-	-	-
-	-	-	-	-	-
Yes	Yes	Yes	Yes	Yes	Yes
1ch Host or Slave	1ch Host or Slave	1ch Host or Slave	1ch Host or Slave	1ch Master or Slave	1ch Host or Slave
1ch In or Out	1ch In or Out	1ch In or Out	1ch In or Out	1ch In or Out	1ch In or Out
2 Inputs	2 Inputs	2 Inputs	2 Inputs	2 Inputs	2 Inputs
1 Relay	1 Relay	1 Relay	1 Relay	1 Relay	1 Relay
-	-	-	-	-	-
1.2 GHz Quad Core	1.2 GHz	1.2 GHz Quad Core	1.0 GHz	1.0 GHz	533 MHz DSP
2 GB Flash + 256 MB RAM	4GB Flash + 64MB RAM	2 GB Flash + 256 MB RAM	8 GB Flash + 64 MB RAM	4 GB Flash + 64 MB RAM	16 MB Flash + 16 MB RAM
16-bit Hi-Fi	16-bit Hi-Fi	Multi-tone Buzzer	Multi-tone Buzzer	Multi-tone Buzzer	Multi-tone Buzzer
-20°C ~ 50°C (-4°F ~ 122°F)	-20°C ~ 50°C (-4°F ~ 122°F)	-20°C ~ 50°C (-4°F ~ 122°F)	-20°C ~ 50°C (-4°F ~ 122°F)	-35°C ~ 65°C (-31°F ~ 149°F)	-35°C ~ 65°C (-31°F ~ 149°F)
Yes	Yes	Yes	Yes	Yes	Yes
12VDC	12VDC	12VDC	12VDC	12VDC	12VDC
-	-	Yes	-	Yes	-
71 x 201 x 44	58 x 190 x 44	50 x 172 x 43.5	50 x 164 x 37.5	XP2-MDPB: 48 x 145 x 27 XP2-GDPB/GKDPB: 80 x 130 x 25	80 x 120 x 11.4
CE, FCC, KC, RoHS, REACH, WEEE	CE, FCC, KC, RoHS, REACH, WEEE	CE, FCC, KC, RoHS, REACH, WEEE, UL 294	CE, FCC, KC, RoHS, REACH, WEEE	CE, FCC, KC, RoHS, REACH, WEEE, SIG	CE, FCC, KC, RoHS, REACH, WEEE


* Thirty templates per face * Two templates per finger * DESFire EV2 cards are supported by having backward compatibility of DESFire EV1 cards. CSN and smart card functions are compatible with Suprema devices. * Some models(BEW2-ODP, BEW2-OAP, BEW2-OHP) do not support BLE.

Product		
Product Name		CoreStation (CS40)
Capacity	Max. Users (1:1)	500,000
	Max. Users (1:N)	100,000
	Max. Templates (1:1)	1,000,000*
	Max. Templates (1:N)	200,000*
	Max. Card	500,000
	Max. PIN	500,000
	Max. Text Logs	5,000,000
Interfaces	TCP/IP	Yes
	RS-485	5ch
	RS-485 Communication Protocol	OSDP V2 Compliant
	Wiegand	4ch
	Relay	4 Relay
	TTL Input	8ch (Supervised Input Selectable)
	TTL Output	8ch
AUX Input	2ch (AC Power Fail, Tamper)	
Connectivity	Max. Slave Devices (RS-485)	Max. 64 devices (Max. 31 devices per port)
	Max. Wiegand Devices	Max. 132 devices (with DM-20)
Hardware	CPU	1.4 GHz Octa Core
	Memory	8GB Flash + 1GB RAM
	LED	Multi-color
	Operating Temperature	0°C ~ 50°C (32°F ~ 122°F)
	Tamper	Optional (ENCR-10)
	Power	12VDC
	Dimensions (W x H x D mm)	150 x 214 x 21
Certifications	CE, FCC, KC, RoHS, REACH, WEEE	

Product			
Product Name		BioEntry R2	XPass D2
General	Biometrics	Fingerprint	-
	Protection Class	-	IP65, IP67, IK08
	RF Options	BER2-OD: 125kHz EM & 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2*, FeliCa	XPD2-MDB, XPD2-GDB, XP2-GKDB: 125kHz EM & 13.56MHz MIFARE, MIFARE Plus, DESFire EV1/EV2*, FeliCa, NFC & 2.4GHz BLE
Interfaces	RS-485	1ch Slave	1ch Slave
	Wiegand	-	1ch Out
Hardware	CPU	1.0 GHz Quad Core	80 MHz
	Memory	32MB Flash + 32MB RAM	512KB Flash + 160KB RAM
	Audio	Multi-tone Buzzer	Multi-tone Buzzer
	Operating Temperature	-20°C ~ 50°C (-4°F ~ 122°F)	-35°C ~ 65°C (-31°F ~ 149°F)
	Tamper	Yes	Yes
	Power	12VDC	12VDC
	Dimensions (W x H x D mm)	50 x 164 x 37.5	XPD2-MDB: 48 x 145 x 27 XPD2-GDB/GKDB: 80 x 130 x 25
	Certifications	CE, FCC, KC, RoHS, REACH, WEEE	CE, FCC, KC, RoHS, REACH, WEEE, SIG

Product				
Product Name		OM-120 (Output Module)	DM-20 (Door Module)	Secure I/O 2 (I/O Module)
Interfaces	RS-485	1ch	1ch	1ch
	Wiegand	-	2ch	-
	Relay	12 Relays	4 Relays	1 Relay
	Input	-	TTL Input: 4ch Supervised Input: 4ch	2ch
	Output	-	6ch	-
	AUX Input	2ch Dry Contact Input	-	-
Hardware	CPU	Cortex M3 72MHz	Cortex M 32MHz	Cortex M 32MHz
	Memory	128KB Flash + 20KB SRAM	128KB Flash + 20KB SRAM	128KB Flash + 20KB SRAM
	LED	Multi-color	Multi-color	Multi-color
	Operating Temperature	-20°C ~ 60°C (-4°F ~ 140°F)	-20°C ~ 60°C (-4°F ~ 140°F)	-20°C ~ 50°C (-4°F ~ 122°F)
	Power	12VDC	12VDC	12VDC
	Dimensions (W x H x D mm)	90 x 190 x 21	130 x 90.5 x 35.8	36 x 65 x 18
	Certifications	CE, FCC, KC, RoHS, REACH, WEEE	CE, FCC, KC, RoHS, REACH, WEEE	CE, FCC, KC, RoHS

* Two templates per finger * DESFire EV2 cards are supported by having backward compatibility of DESFire EV1 cards. CSN and smart card functions are compatible with Suprema devices.

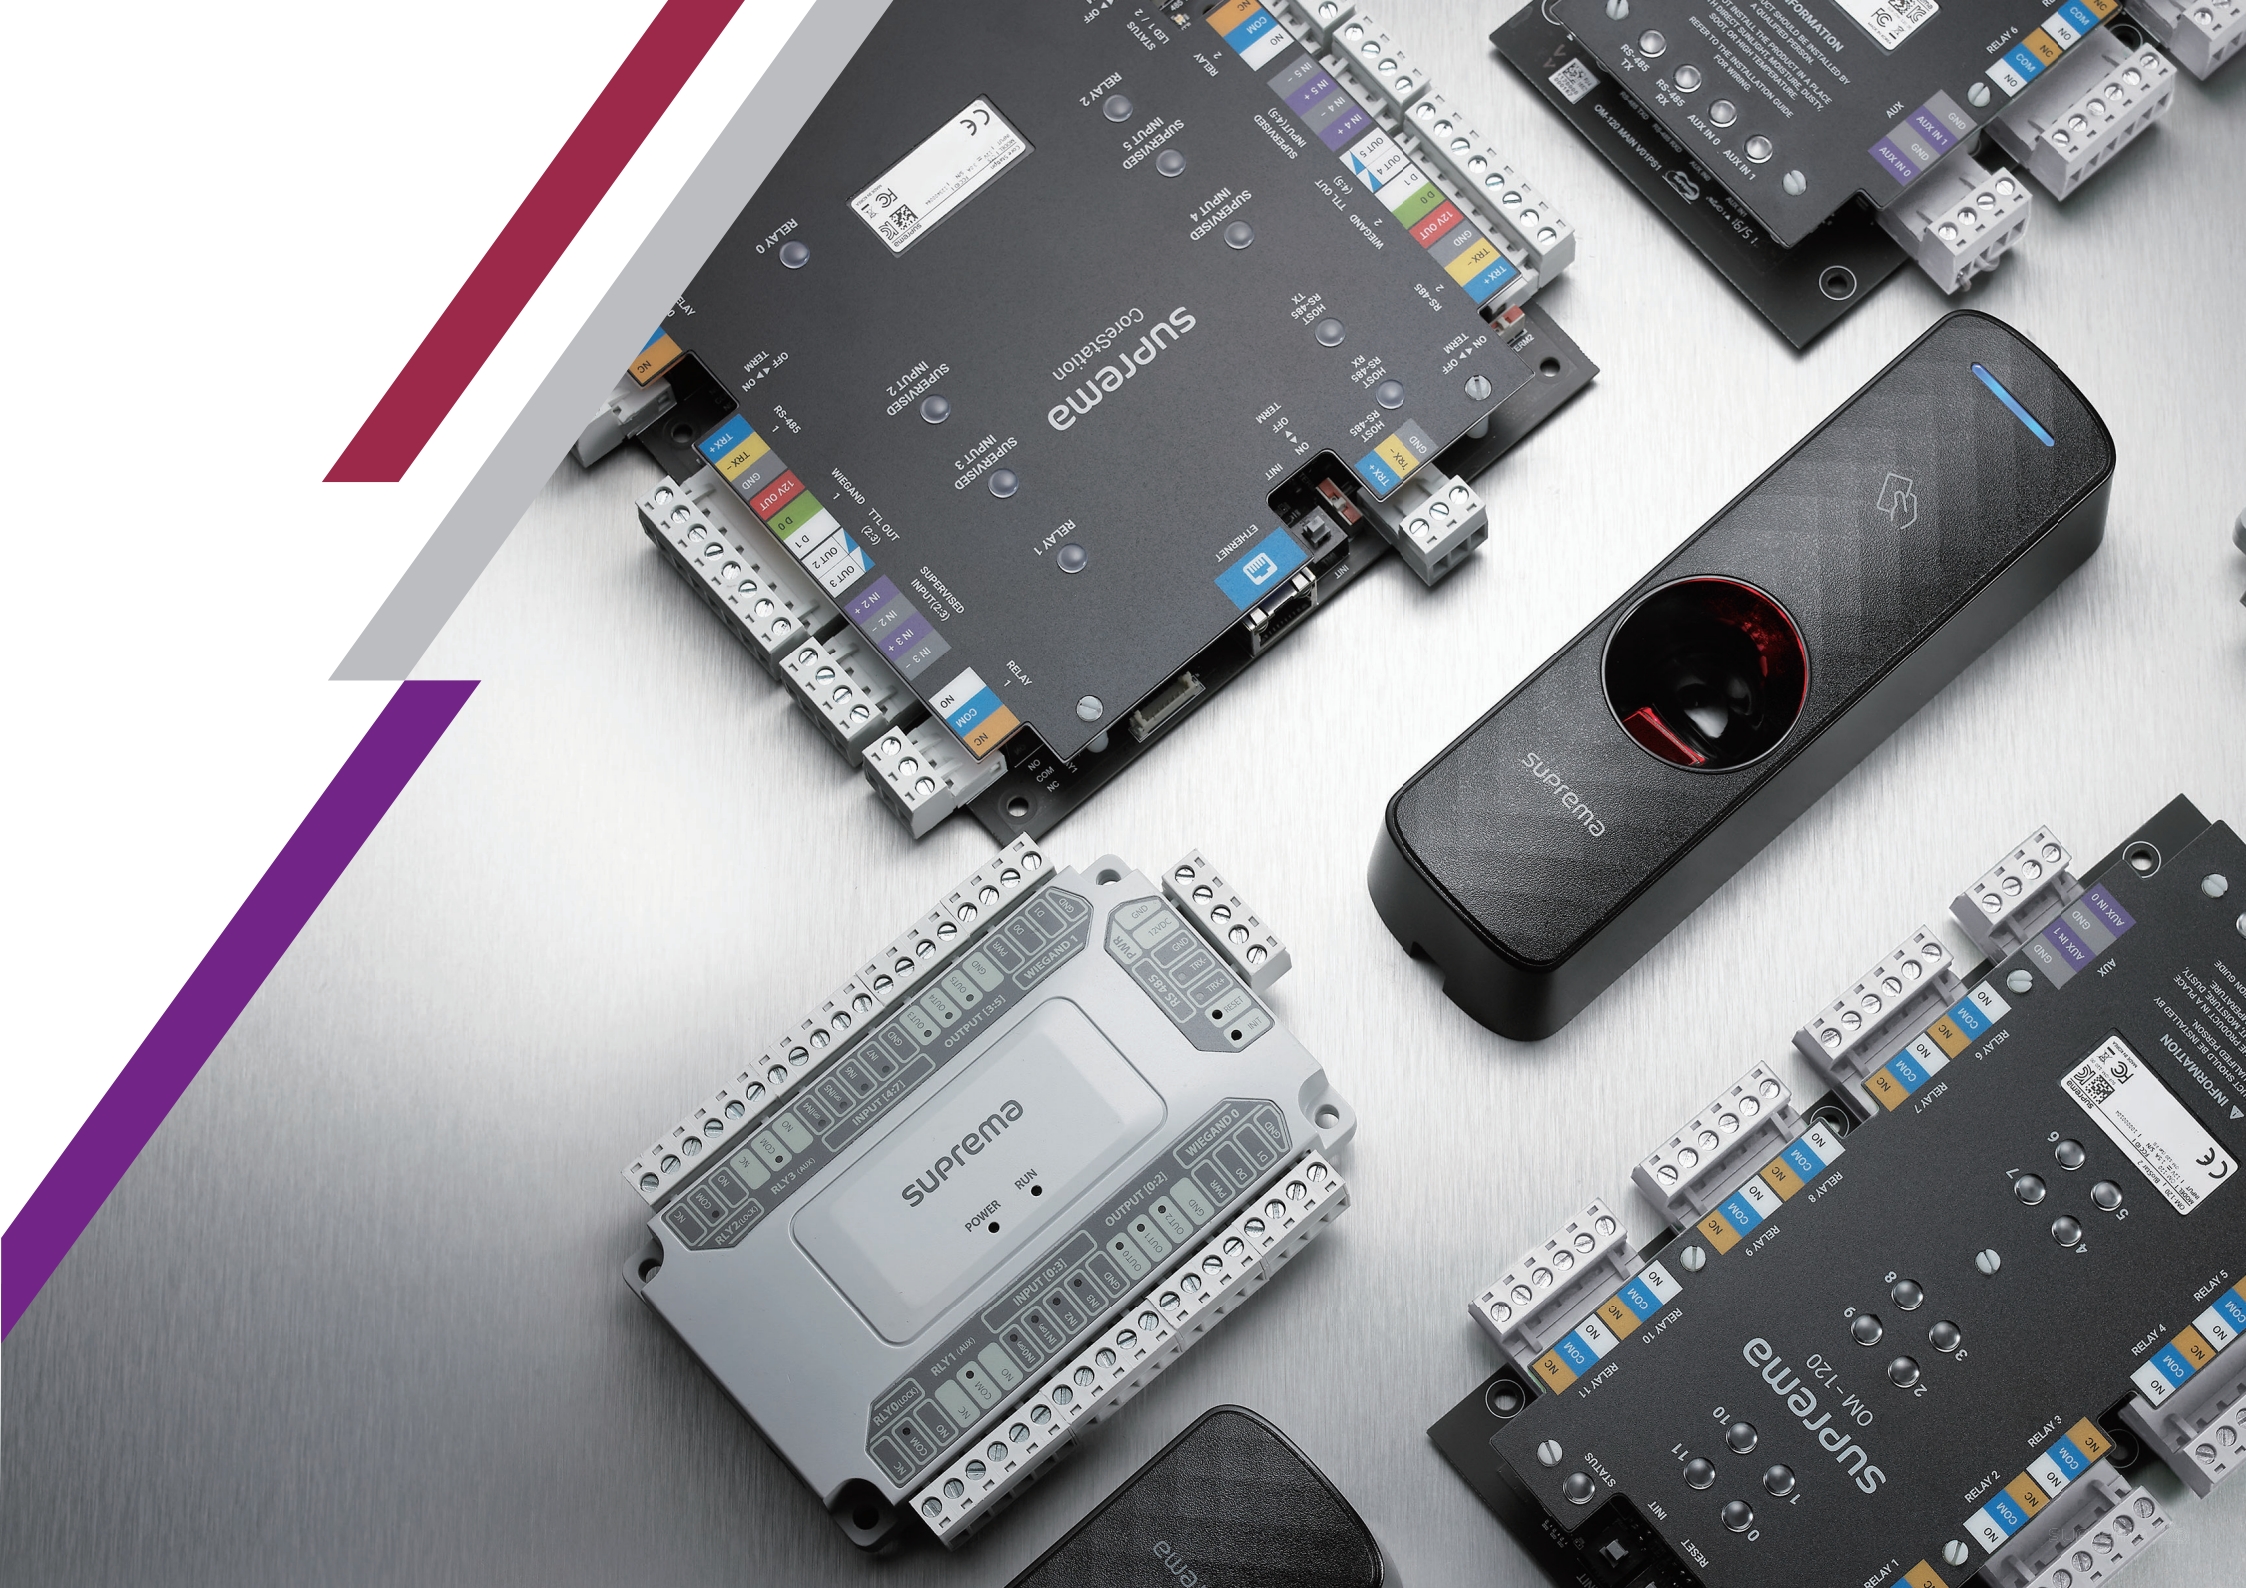

Suprema
CoreStation

Suprema

Suprema

Suprema
OM-120



Suprema Inc.

17F Parkview Tower, 248, Jeongjail-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, 13554, Republic of Korea
T +82 31 783 4502 E sales_sys@supremainc.com www.supremainc.com



For more information about Suprema's global branch offices,
visit the webpage below by scanning the QR code.
<https://www.supremainc.com/en/about/contact-us.asp>

©2020 Suprema Inc. Suprema and identifying product names and numbers herein are registered trade marks of Suprema, Inc. All non-Suprema brands and product names are trademarks or registered trademarks of their respective companies. Product appearance, build status and/or specifications are subject to change without notice. [SUPREMA-AMB-LB-EN-REV26]